



ICT 5103: Database Design and Management

Lecture 8

Instructor: Samin Rahman Khan

Overview of Storage and Indexing

Slides were taken from

Chapter 8

© Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

File Organization

- The basic abstraction of data in a DBMS is a collection of records, or a file, and each file consists of one or more pages.
- The files and access methods software layer organizes data carefully to support fast access to desired subsets of records.
- A **file organization** is a method of arranging the records in a file when the file is stored in disk.
- Each file organization makes certain operations efficient but other operations expensive.

Data on External Storage

- Disks: Can retrieve random page at fixed cost
 - But reading several consecutive pages is much cheaper than reading them in random order
- Tapes: Can only read pages in sequence
 - Cheaper than disks; used for archival storage
- File organization: Method of arranging a file of records on external storage.
 - Record id (rid) is sufficient to physically locate record
 - Indexes are data structures that allow us to find the record ids of records with given values in index search key fields
- Architecture: Buffer manager stages pages from external storage to main memory buffer pool. File and index layers make calls to the buffer manager

Alternative File Organization

- Many alternatives exist, each ideal for some situations, and not so good in others:
 - Heap (random order) files: Suitable when typical access is a file scan retrieving all records.
 - Sorted Files: Best if records must be retrieved in some order, or only a 'range' of records is needed.
 - Indexes: Data structures to organize records via trees or hashing.
 - Like sorted files, they speed up searches for a subset of records, based on values in certain ("search key") fields
 - Updates are much faster than in sorted files

Indexes

- An index on a file speeds up selections on the search key fields for the index.
 - Any subset of the fields of a relation can be the search key for an index on the relation.
 - Search key is not the same as key (minimal set of fields that uniquely identify a record in a relation).
- An index contains a collection of data entries, and supports efficient retrieval of all data entries k^* with a given key value k

Alternatives for Data Entry k^* in Index

- Three alternatives:
 - Data record with key value k
 - $\langle k, \text{rid of data record with search key value } k \rangle$
 - $\langle k, \text{list of rids of data records with search key } k \rangle$
- Choice of alternative for data entries is orthogonal to the indexing technique used to locate data entries with a given key value k .
 - Examples of indexing techniques: B+ trees, hash-based structures
 - Typically, index contains auxiliary information that directs searches to the desired data entries

Alternatives for Data Entries (Contd)

- Alternative 1:
 - If this is used, index structure is a file organization for data records (instead of a Heap file or sorted file).
 - At most one index on a given collection of data records can use Alternative 1. (Otherwise, data records are duplicated, leading to redundant storage and potential inconsistency.)
 - If data records are very large, # of pages containing data entries is high. Implies size of auxiliary information in the index is also large, typically.

Alternatives for Data Entries (Contd)


- Alternatives 2 and 3:
 - Data entries typically much smaller than data records. So, better than Alternative 1 with large data records, especially if search keys are small. (Portion of index structure used to direct search, which depends on size of data entries, is much smaller than with Alternative 1.)
 - Alternative 3 more compact than Alternative 2, but leads to variable sized data entries even if search keys are of fixed length.

Index Classification

- Primary vs. secondary: If search key contains primary key, then called primary index.
 - Unique index: Search key contains a candidate key.
- Clustered vs. unclustered: If order of data records is the same as, or 'close to', order of data entries, then called clustered index.
 - Alternative 1 implies clustered; in practice, clustered also implies Alternative 1 (since sorted files are rare).
 - A file can be clustered on at most one search key.
 - Cost of retrieving data records through index varies greatly based on whether index is clustered or not!

Clustered vs. Unclustered Index


- Suppose that Alternative (2) is used for data entries, and that the data records are stored in a Heap file.
 - To build clustered index, first sort the Heap file (with some free space on each page for future inserts).
 - Overflow pages may be needed for inserts. (Thus, order of data recs is 'close to', but not identical to, the sort order.)

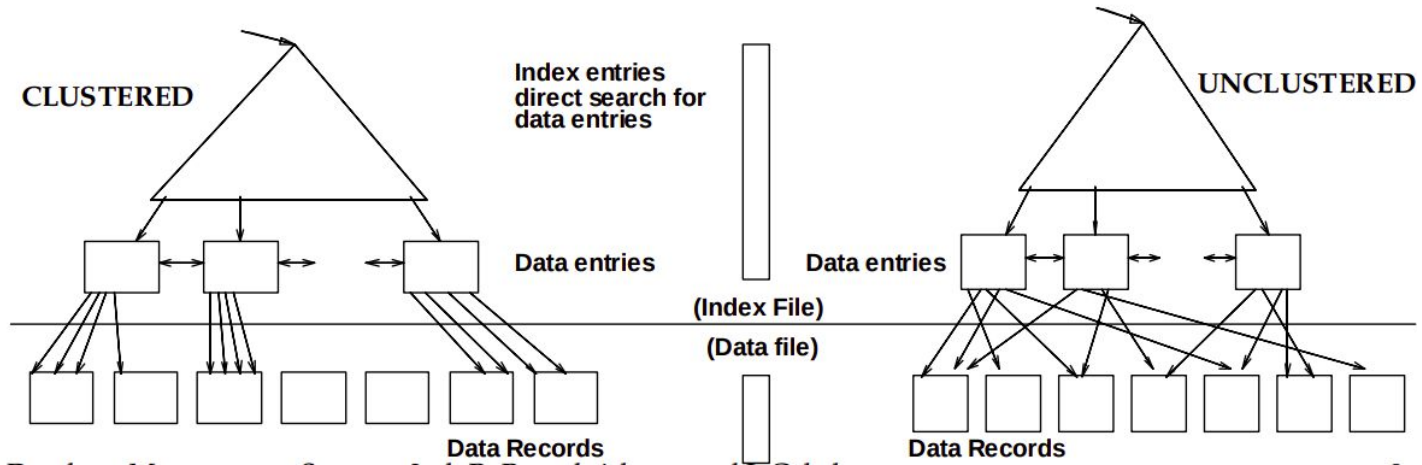


Hash-Based Indexes

- Good for equality selections.
 - Index is a collection of buckets. Bucket = primary page plus zero or more overflow pages.
 - Hashing function h : $h(r)$ = bucket in which record r belongs. h looks at the search key fields of r .
- If Alternative (1) is used, the buckets contain the data records; otherwise, they contain $\langle \text{key}, \text{rid} \rangle$ or $\langle \text{key}, \text{rid-list} \rangle$ pairs.


B+ Tree Indexes

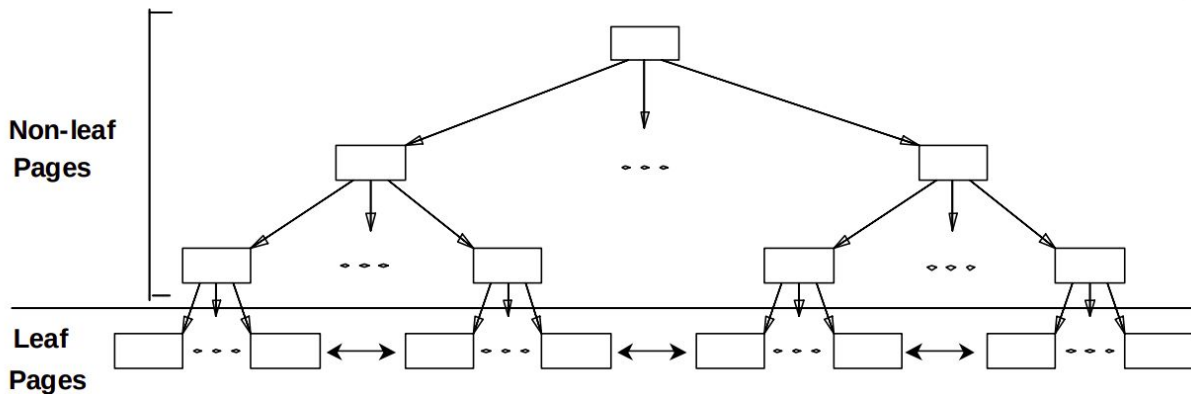

- Leaf pages contain data entries, and are chained (prev & next)
- Non-leaf pages contain index entries and direct searches

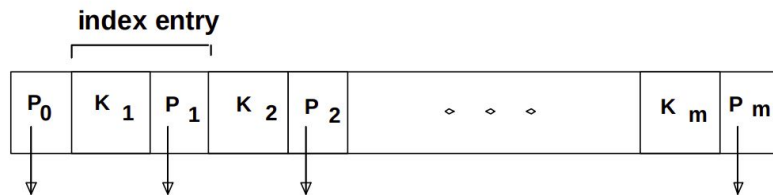

Example B+ Trees

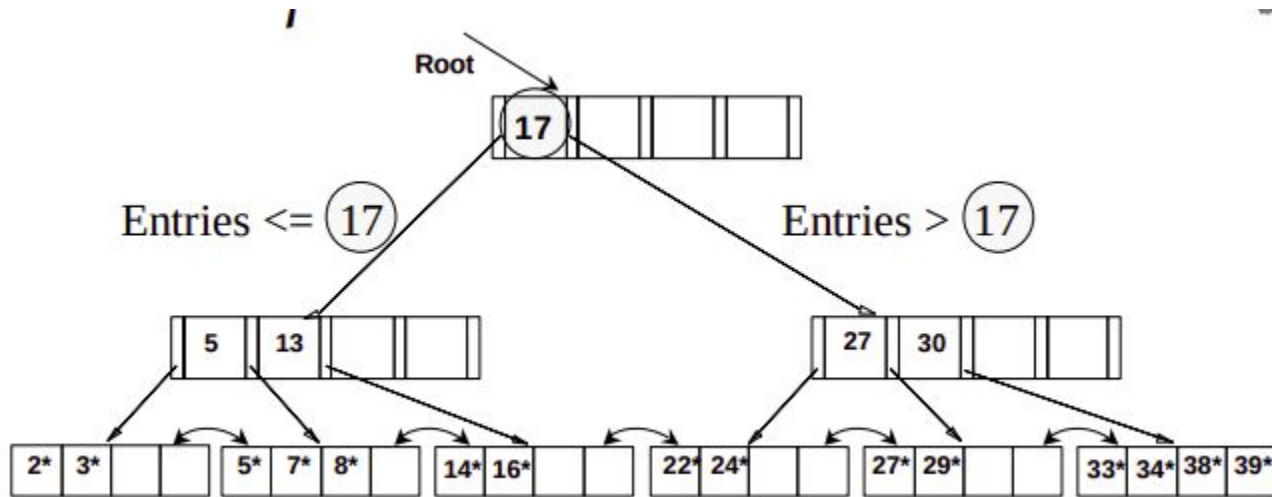

- Find 28*? 29*? All > 15* and < 30*
- Insert/delete: Find data entry in leaf, then change it. Need to adjust parent sometimes.
 - And change sometimes bubbles up the

Cost Model for Our Analysis

We ignore CPU costs, for simplicity:

- B: The number of data pages
- R: Number of records per page
- D: (Average) time to read or write disk page
- Measuring number of page I/O's ignores gains of pre-fetching a sequence of pages; thus, even I/O cost is only approximated.
- Average-case analysis; based on several simplistic assumptions.

* Good enough to show the overall trends!

Comparing File Organizations

- Heap files (random order; insert at eof)
- Sorted files, sorted on <age, sal>
- Clustered B+ tree file, Alternative (1), search key <age, sal>
- Heap file with unclustered B + tree index on search key <age, sal>
- Heap file with unclustered hash index on search key <age, sal>

Operations to Compare

- Scan: Fetch all records from disk
- Equality search
- Range selection
- Insert a record
- Delete a record

Assumptions in Our Analysis

- Heap Files:
 - Equality selection on key; exactly one match.
- Sorted Files:
 - Files compacted after deletions.
- Indexes:
 - Alt (2), (3): data entry size = 10% size of record
 - Hash: No overflow buckets.
 - 80% page occupancy => File size = 1.25 data size
 - Tree: 67% occupancy (this is typical).
 - Implies file size = 1.5 data size

Cost of Operations

	(a) Scan	(b) Equality	(c) Range	(d) Insert	(e) Delete
(1) Heap					
(2) Sorted					
(3) Clustered					
(4) Unclustered Tree index					
(5) Unclustered Hash index					

** Several assumptions underlie these (rough) estimates!*

Cost of Operations

	(a) Scan	(b) Equality	(c) Range	(d) Insert	(e) Delete
(1) Heap	BD	0.5BD	BD	2D	Search +D
(2) Sorted	BD	$D \log_2 B$	$D \log_2 B + \# \text{ matches}$	Search + BD	Search +BD
(3) Clustered	1.5BD	$D \log_F 1.5B$	$D \log_F 1.5B + \# \text{ matches}$	Search + D	Search +D
(4) Unclustered Tree index	$BD(R+0.15)$	$D(1 + \log_F 0.15B)$	$D \log_F 0.15B + \# \text{ matches}$	$D(3 + \log_F 0.15B)$	Search + 2D
(5) Unclustered Hash index	$BD(R+0.15)$	2D	BD	4D	Search + 2D

** Several assumptions underlie these (rough) estimates!*

Understanding the Workload

- For each query in the workload:
 - Which relations does it access?
 - Which attributes are retrieved?
 - Which attributes are involved in selection/join conditions? How selective are these conditions likely to be?
- For each update in the workload:
 - Which attributes are involved in selection/join conditions? How selective are these conditions likely to be?
 - The type of update (INSERT/DELETE/UPDATE), and the attributes that are affected.

Choice of Indexes

- What indexes should we create?
 - Which relations should have indexes? What field(s) should be the search key? Should we build several indexes?
- For each index, what kind of an index should it be?
 - Clustered? Hash/tree-based

Choice of Indexes (Contd.)

- One approach: Consider the most important queries in turn. Consider the best plan using the current indexes, and see if a better plan is possible with an additional index. If so, create it.
 - Obviously, this implies that we must understand how a DBMS evaluates queries and creates query evaluation plans!
 - For now, we discuss simple 1-table queries.
- Before creating an index, must also consider the impact on updates in the workload!
 - Trade-off: Indexes can make queries go faster, updates slower. Require disk space, too.

Index Selection Guidelines

- Attributes in WHERE clause are candidates for index keys.
 - Exact match condition suggests hash index.
 - Range query suggests tree index.
 - Clustering is especially useful for range queries; can also help on equality queries if there are many duplicates.
- Multi-attribute search keys should be considered when a WHERE clause contains several conditions.
 - Order of attributes is important for range queries.
 - Such indexes can sometimes enable index-only strategies for important queries.
 - For index-only strategies, clustering is not important!
- Try to choose indexes that benefit as many queries as possible. Since only one index can be clustered per relation, choose it based on important queries that would benefit the most from clustering.

Examples of Clustered Indexes

- B+ tree index on E.age can be used to get qualifying tuples.
 - How selective is the condition?
 - Is the index clustered?
- Consider the GROUP BY query.
 - If many tuples have E.age > 10, using E.age index and sorting the retrieved tuples may be costly.
 - Clustered E.dno index may be better!
- Equality queries and duplicates:
 - Clustering on E.hobby helps!


```
SELECT E.dno  
FROM Emp E  
WHERE E.age>40
```

```
SELECT E.dno, COUNT (*)  
FROM Emp E  
WHERE E.age>10  
GROUP BY E.dno
```

```
SELECT E.dno  
FROM Emp E  
WHERE E.hobby=Stamps
```

Indexes with Composite Search Keys

- Composite Search Keys: Search on a combination of fields.
 - Equality query: Every field value is equal to a constant value. E.g. wrt index:
 - age=20 and sal =75
 - Range query: Some field value is not a constant. E.g.:
 - age =20; or age=20 and sal > 10
- Data entries in index sorted by search key to support range queries.
 - Lexicographic order, or
 - Spatial

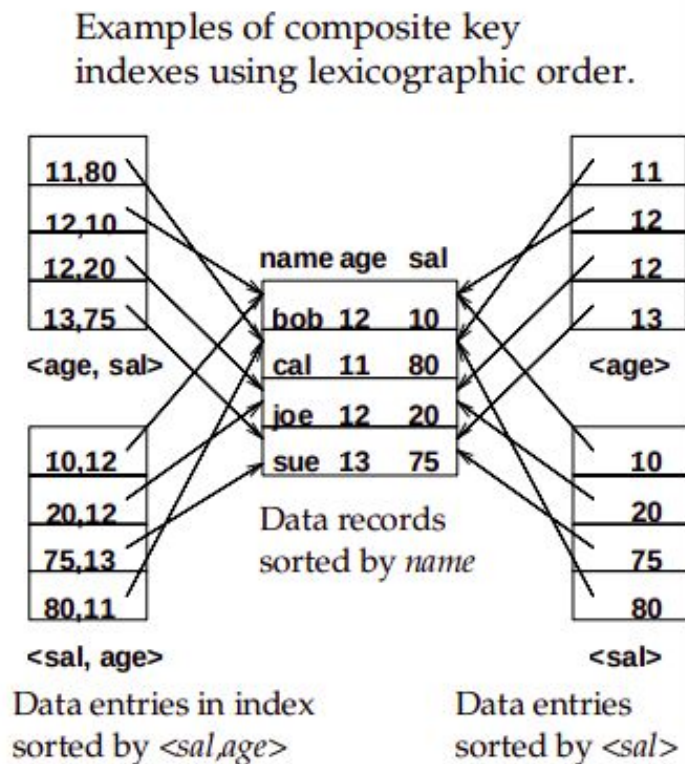

Composite Search Keys

- To retrieve Emp records with $\text{age}=30$ AND $\text{sal}=4000$, an index on $\langle \text{age}, \text{sal} \rangle$ would be better than an index on age or an index on sal.
 - Choice of index key orthogonal to clustering etc.
- If condition is: $20 < \text{age} < 30$ AND $3000 < \text{sal} < 5000$:
 - Clustered tree index on $\langle \text{age}, \text{sal} \rangle$ or $\langle \text{sal}, \text{age} \rangle$ is best
- If condition is: $\text{age}=30$ AND $3000 < \text{sal} < 5000$:
 - Clustered $\langle \text{age}, \text{sal} \rangle$ index much better than $\langle \text{sal}, \text{age} \rangle$ index!
- Composite indexes are larger, updated more often.

Creating Index in MySQL

```
CREATE INDEX index_name  
    [index_type]  
    ON tbl_name (key_part,...)
```

key_part: {col_name [(length)] | (expr)} [ASC | DESC]

index_type:
 USING {BTREE | HASH}

Full Documentation:

<https://dev.mysql.com/doc/refman/8.0/en/create-index.html>

Summary

- Many alternative file organizations exist, each appropriate in some situation.
- If selection queries are frequent, sorting the file or building an index is important.
 - Hash-based indexes only good for equality search.
 - Sorted files and tree-based indexes best for range search; also good for equality search. (Files rarely kept sorted in practice; B+ tree index is better.)
- Index is a collection of data entries plus a way to quickly find entries with given key values.

Summary (Contd.)

- Data entries can be actual data records, $\langle \text{key}, \text{rid} \rangle$ pairs, or $\langle \text{key}, \text{rid-list} \rangle$ pairs.
 - Choice orthogonal to indexing technique used to locate data entries with a given key value.
- Can have several indexes on a given file of data records, each with a different search key.
- Indexes can be classified as clustered vs. unclustered, primary vs. secondary, and dense vs. sparse. Differences have important consequences for utility/performance.

Summary (Contd.)

- Understanding the nature of the workload for the application, and the performance goals, is essential to developing a good design.
 - What are the important queries and updates? What attributes/relations are involved?
- Indexes must be chosen to speed up important queries (and perhaps some updates!).
 - Index maintenance overhead on updates to key fields.
 - Choose indexes that can help many queries, if possible.
 - Build indexes to support index-only strategies.
 - Clustering is an important decision; only one index on a given relation can be clustered!
 - Order of fields in composite index key can be important.